

SFPP-SR-10GD

10GBASE, SFP+, SR, MMF TRANSCEIVER

850nm, 300m REACH, DUPLEX LC CONNECTOR

Product Features

- Up to 11.3Gbps Data Links
- Hot-Pluggable SFP+
- Duplex LC connector
- Up to 300m transmission on MMF
- Single +3.3V Power Supply
- Power dissipation < 1W
- Compliant with SFF-8472
- Compliant to 802.3ae 10GBASE-SR
- RoHS compliant
- Available operating temperature ranges:
 - Commercial: 0°C to 70°C
 - Industrial: -40°C to 85°C



Product Applications

- 10GBASE-SR/SW & 10G Ethernet
- OTN / FC / CPRI

I. Maximum Ratings

Exceeding the limits below may damage the transceiver module permanently.

Parameter	Symbol	Min.	Typ.	Max.	Units
Storage Temperature	TS	-40		+85	°C
Power Supply Voltage	Vcc	-0.3		4	V
Relative Humidity	RH	5		95	%
Signal Input Voltage		Vcc-0.3		Vcc+0.3	V

II. Operating Specifications

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
Case Operating Temperature	TC	0		+70	°C	Commercial
		-40		+85		Industrial
Supply Voltage	VCC	3.14	3.3	3.47	V	
Supply Current	Icc			300	mA	
Data Rate	BR		10.3125		Gbps	
Transmission Distance	TD			300	m	
Coupled fiber	Multi-mode fiber					

III. Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Average Launched Power	Pout	-6		-0.5	dBm	1
Extinction Ratio	ER	3.0			dB	
Optical Wavelength	λ	840	850	860	nm	
RIN	RIN			-128	dB/Hz	
Output Eye Mask	Compliant with IEEE 802.3ae					
Receiver						
Optical Input Wavelength	λc	840		860	nm	
RX Sensitivity	Psen			-10	dBm	2
Receiver Overload	Psat	0.5			dBm	
RX_LOS Assert	LOS A	-30			dBm	
RX_LOS De-assert	LOS D			-12	dBm	
RX_LOS Hysteresis	LOS H	0.5			dB	

Notes:

1. Launched power (avg.) is power coupled into a single mode fiber with master connector 20-80%.
2. Measured with conformance test signal for BER = 10⁻¹² @ 10.3125 Gbps, PRBS=2³¹-1, NRZ

IV. Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Supply Voltage	Vcc	3.14	3.3	3.46	V	
Supply Current	Icc			300	mA	
Transmitter						
Input differential impedance	RIN		100		Ω	1
Single ended data input swing	Vin PP	180		700	mVpp	
Transmit Disable Voltage	VD	Vcc-1.3		Vcc	V	2
Transmit Enable Voltage	VEN	Vee		Vee+0.8	V	
Transmit Disable Assert Time	Tdessert			10	us	
Receiver						
Differential data output swing	Vout,pp	300		800	mV	3
Data Output Rise time	tr	28				4
Data Output Fall time	tf	28				4
LOS Fault	Vlosfault	Vcc-1.3		VCC_host	V	5
LOS Normal	Vlosnorm	Vee		Vee+0.8	V	5
Power Supply Rejection	PSR	100			mVpp	6


Notes:

1. AC Coupled.
2. Or Open Circuit.
3. Into 100 ohm differential termination.
4. 20-80%
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

SFPP-SR-10GD

10GBASE, SFP, SR+, MMF TRANSCEIVER

850nm, 300m REACH, DUPLEX LC CONNECTOR

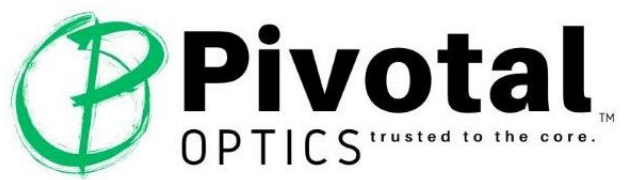

V. Ordering Information

Pivotal Part Number	Description
SFPP-SR-10GD	SFP+, 850nm, SR MMF 300m, 10G DDM, C-Temp
SFPP-SR-10GDI	SFP+, 850nm, SR MMF 300m, 10G DDM, I-Temp

Notes:

1. Please contact sales for specific OEM Platform part numbers to fit your network.

Warranty

<https://pivotaloptics.com/warranty/>

Disclaimer

External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.